

**Features**

- Light level measurement
- Programmable via IR remote
- Programmable sensor time-out
- Switch inputs for switch models
- Programmable switch features
- Multiple mounting options available
- Control based on ambient light and motion detection

**Weatherproof case**

IP65 rating with surface mount accessory case

**High ceiling**

Suitable for mounting on high ceilings up to 12m

**Motion detection**

Detection range 360°
max. range 8 m

**Dusk detection**

Control based on ambient light and motion detection



Product range

Order code	Description
zc-pir-st-r	Standalone PIR sensor 8 m, with inbuilt relay
zc-pir-st-1sw-r	Standalone PIR sensor 8 m, with inbuilt relay and one switch

Features

- PIR motion sensor
- Light level measurement
- Programmable via IR remote
- Switch inputs for switch models
- IP65 weatherproof rating with mounting accessory

Programmable features (IR)


- Sensor time-out
- Lux level, dusk (if under lux level, activate sensor)
- Lux level, disable (if over lux level, disable sensor)

Programmable features (switch)

- Switch type (on / off, absence)
- Switch actions (enable / disable sensor, enable / disable lux)

Dimensions

Cut out	Min Ø83 mm	Dimensions	Ø95 / 55 mm
----------------	------------	-------------------	-------------

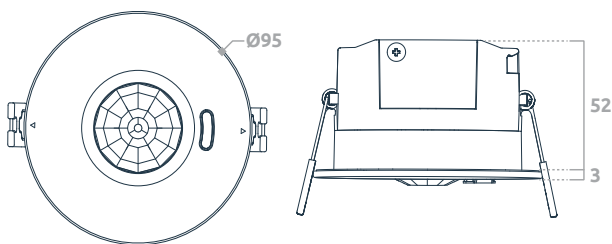


Specifications


Supply	220 - 240 V ~50 Hz	
Supply current	< 0.1 A	
Relay output (-r models)	120 A / 20 ms inrush current 10 A resistive ⚡ 6 A inductive ⚡	
Output voltage rating AC (-vf models)	10 A resistive ⚡ 6 A inductive ⚡	
Output load rating DC (-vf models)	0 - 25 V 3 A resistive ⚡ 25 - 240 V 200 mA resistive ⚡	
Lens	Fresnel	
Sensors	PIR, IR, lux	
IR	38 kHz	
Wiring	2.5 mm ² cable (no earth, suits round and tps)	
Operating temperature	-10 to 55°C	
Material	PC (body)	
Ingress protection	IP54 (front-face only) IP65 (with surface or wall mount)	
Mounting (kits sold separately)	Recessed (cut-out min Ø83 mm) Wall mount kit (mounting centres 85 mm) Surface mount kit Rod mount kit Conduit mount kit (mounting centres 50-60 mm)	
Compliance standards	IEC 61347-2-11 IEC 60669-2-1 CISPR 15	EN 55015 IEC 62386-101 IEC 62386-103

Detection pattern


Mounting height	2 - 12 m	Range ⌀	8 m (mounted at 2.7 m)
------------------------	----------	----------------	------------------------

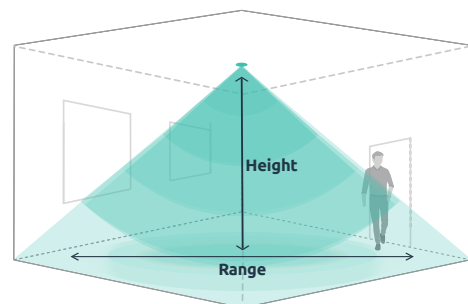


Wiring

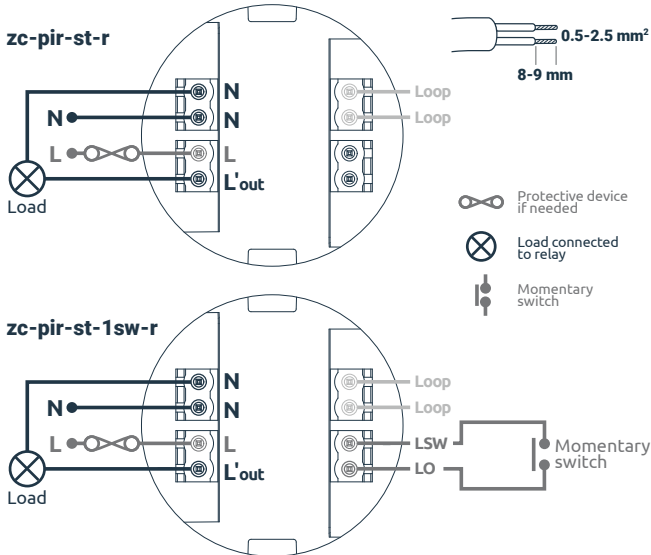


Presence mode

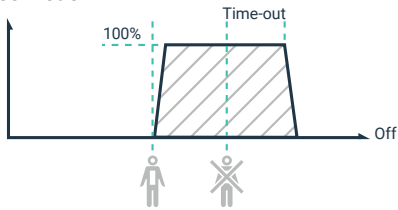

Presence mode (with switch)

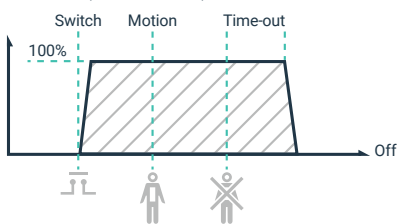


Absence mode

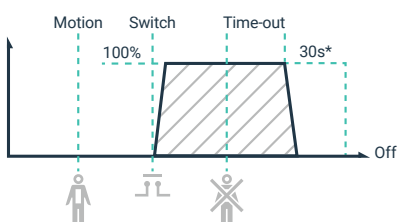

* If motion is detected within 30 seconds after the time-out the output will turn on. After 30 seconds has elapsed a switch press is required to turn the output on again.

Wiring overview

The sensor can be wired via the terminals found under the terminal covers, as seen below. The amount of terminals will vary depending on model.

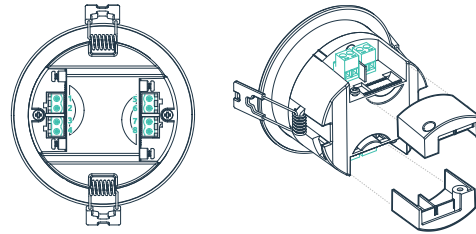

Accessory range*

Fig.	Order code	Description
7	zc-smart-wall-kit	Smart sensor wall mount kit
8	zc-smart-sm-kit	Smart sensor surface mount kit, suitable for surface, rod and conduit mounting
9	zc-rodmount-wht	Rod mount kit, white, to be used with Smart sensor surface mount kit
10	n/a	Conduit mount, not supplied by zencontrol, used with Smart sensor surface mount kit
11	zc-ir-ctrl-com	Hand-held infrared control and commissioning unit

7 Wall mount



8 Surface mount



9 Rod mount



10 Conduit mount



11 IR controller



*Sold separately