



### Features

- Plug-in expansion for Emergency Smart driver range
- Emergency upgrade only adds 50 mW avg. power consumption
- 3000 mAh kit available for increased lumen output / duration
- High Quality Lithium battery (LiFePO<sub>4</sub>)
- Suitable for OEM installation
- Long life electronics



#### Device type 1

Functions as a maintained dimmable IEC62386-202 device



#### Low power consumption

Adds less than a 50 mW to the standby power




#### Plug-in upgrade

Simply plug-in battery and test switch to upgrade device



#### Single point unit

Out of the box the OEM works as a SPU

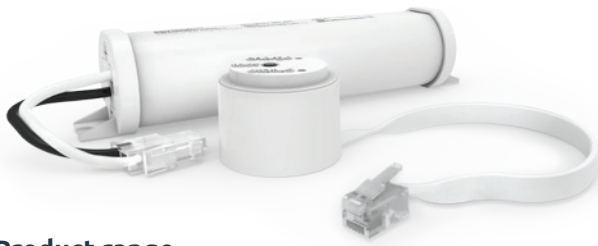

## Product range

Order code	Description
<b>zc-em-kit</b>	1500 mAh, Emergency expansion kit, for zc-smart-driver-em*
<b>zc-em-kit-3</b>	3000 mAh, Emergency expansion kit, for zc-smart-driver-em*

## Features

- Plug-in expansion for Emergency Smart driver range\*
- Emergency upgrade less than 50 mW avg. power consumption
- 3000 mAh kit available for increased lumen output / duration
- High Quality Lithium battery (LiFePO<sub>4</sub>)
- Suitable for OEM installation

## Kit content

Status LED and test switch assembly to suit zc-smart-driver-em\*

RJ12 connection cable, 900 mm

1500 or 3000 mAh, 6.4V 2 Cell LiFePO<sub>4</sub> Battery

## Supported models\*

Order code	Description
<b>zc-smart-driver-em-40</b>	40 W DALI Smart driver with emergency, softwire plug
<b>zc-smart-driver-em-40-t</b>	40 W DALI Smart driver with emergency, screw-terminal
<b>zc-smart-driver-em-40-p</b>	40 W DALI Smart driver with emergency, push-terminal
<b>zc-smart-driver-em-40-au</b>	40 W DALI Smart driver with emergency, 90 min, softwire plug
<b>zc-smart-driver-em-40-au-t</b>	40 W DALI Smart driver with emergency, 90 min, screw-terminal

## Accessory range

Order code	Description
<b>zc-pir-sm-kit</b>	Surface mount kit
<b>zc-pir-rs-kit</b>	Recessed mount kit
<b>zc-pir-cd-kit</b>	Conduit mount kit

## Specifications

<b>Wiring</b>	Plug-in loom
<b>Operating temperature</b>	0 to 40°C
<b>Ingress protection</b>	IP20
<b>Mounting</b>	Inbuilt (mounting kits available)
<b>Material</b>	PC (body)

## Emergency specifications

Product code	zc-em-kit	zc-em-kit-3	
<b>Output</b>	AU / NZS	1.5 W	3.5 W
	EU	1.0 W	1.5 W
<b>Battery**</b>	<b>Battery code</b>	zc-batt-1500	zc-batt-3000
	<b>Capacity</b>	1500 mAh	3000 mAh
	<b>Type</b>	LiFePO <sub>4</sub>	
	<b>Max supply current</b>	750 mA	
<b>Duration</b>	AU / NZS	120 / 90 min	
	EU	180 min	
<b>Charge**</b>	<b>Type</b>	Smart	
	<b>Time</b>	16 hrs	
	<b>Operation</b>	Multi-state	

\*\* Per driver specifications

## Dimensions (mm)

