

**Features**

- Wireless, DALI and standalone
- Works with zencontrol connect
- Bluetooth commissioning
- Microwave motion sensor
- Light level measurement
- IP65 weatherproof rating with mounting accessory
- DALI broadcast control with inbuilt application controller
- Fully compatible with other DALI-2 application controllers
- -iot models include a inbuilt DALI power supply

Includes fully independent IEC62386 devices

- IEC62386 -208 Relay
- IEC62386 -303 Movement sensor
- IEC62386 -304 Light level sensor
- IEC62386 -302 Absolute switch (IR)

**Wireless**

Wireless (IEC62386-104)
connectivity over Thread

**IEC62386 compliant**

Fully IEC62386 compliant
and compatible



Product range

Order code	Description
zc-mw-iot-da	Wireless Microwave sensor 8 m
zc-mw-iot-da-r	Wireless Microwave sensor 8 m with inbuilt relay
zc-mw-iot-da-vf	Wireless Microwave sensor 8 m, with inbuilt volt-free relay
zc-mw-iot-da-2sw-r	Wireless Microwave sensor 8 m, with inbuilt relay and two switches
zc-mw-iot-da-2sw-vf	Wireless Microwave sensor 8 m, with inbuilt volt-free relay and two switches
zc-mw-da	Microwave smart sensor 8 m
zc-mw-da-r	Microwave smart sensor 8 m, with inbuilt relay
zc-mw-da-vf	Microwave smart sensor 8 m, with inbuilt volt-free relay
zc-mw-da-2sw-r	Microwave smart sensor 8 m, with inbuilt relay and two switches
zc-mw-da-2sw-vf	Microwave smart sensor 8 m, with inbuilt volt-free relay and two switches

Features

- Wireless, DALI and standalone
- Works with zencontrol connect
- Bluetooth commissioning
- Microwave motion sensor
- Light level measurement
- IP65 weatherproof rating with mounting accessory
- DALI broadcast control with inbuilt application controller
- Fully compatible with other DALI-2 application controllers
- -iot models include a inbuilt DALI power supply


Fully independent IEC62386 devices

- IEC62386-101 Power supply
- IEC62386-208 Relay
- IEC62386-303 Motion sensor
- IEC62386-304 Light level sensor
- IEC62386-302 Switch (x2)
- IEC62386-301 Switch (x2)

Programmable features (switch)

- Switch type (dimmer, on / off, up / down, colour dimmer, colour warmer, colour cooler)
- Switch actions (enable / disable sensor, enable / disable lux)
- Switch override time

Dimensions (mm)

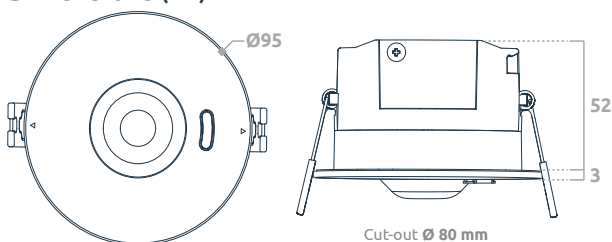


Specifications

Supply	220 - 240 V AC	
Supply current	< 0.1 A	
DALI bus current	<2 mA	
Relay output (-r models)	165 A / 20 ms inrush current 492 A / 1.5 ms LED inrush current 10 A capacitive ⚡ 10 A inductive ⚡ 10 A resistive ⚡	
Output voltage rating AC (-vf models)	10 A resistive ⚡ 6 A inductive ⚡	
Output load rating DC (-vf models)	0 - 25 V 3 A resistive ⚡ 25 - 240 V 200 mA resistive ⚡	
Sensors	Microwave, lux	
Microwave	Microwave 5.8 GHz, 0.2 mW	
Wireless	IEC62386-104 over Thread	
Wiring	2.5 mm ² cable (no earth, suits round and tps)	
Operating temperature	0 to 55°C	
Material	PC (body)	
Ingress protection	IP54 (with seal installed into roof) IP65 (with surface or wall mount)	
Mounting (kits sold separately)	Recessed (cut-out Ø 80 mm) Wall mount kit (mounting centres 85 mm) Surface mount kit Rod mount kit Conduit mount kit (mounting centres 50 - 60 mm)	
Compliance standards	IEC 61347-2-11	IEC 62386-208
	IEC 60669-2-1	IEC 62386-301
	CISPR 15	IEC 62386-302
	EN 55015	IEC 62386-303
	IEC 62386-104	IEC 62386-304

Detection pattern

Mounting height 2 - 12 m **Range Ø** 8 m (mounted at 2.7 m)

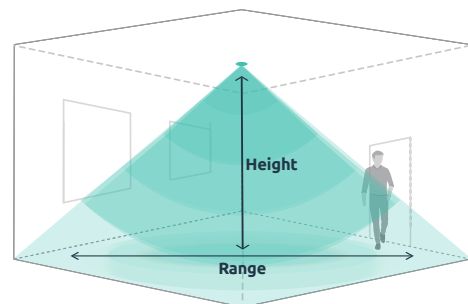


Notice


- The DALI line is not SELV. It must be treated like LV mains and treated with the same precautions and wiring regulations.

Wiring overview


The smart IoT sensor can be wired via the terminals found under the terminal covers, as seen below. The amount of terminals will vary depending on model.

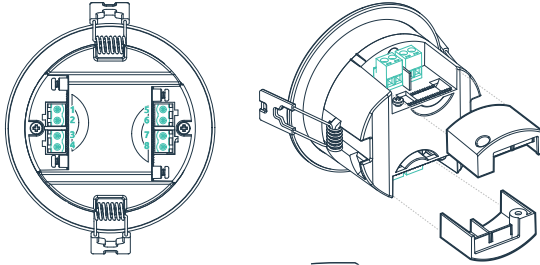

Wiring

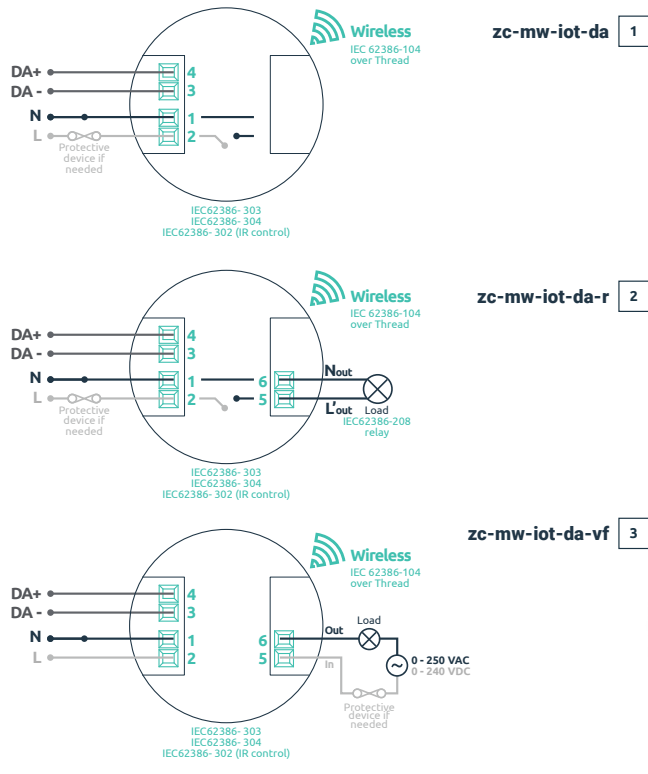

Wireless system overview

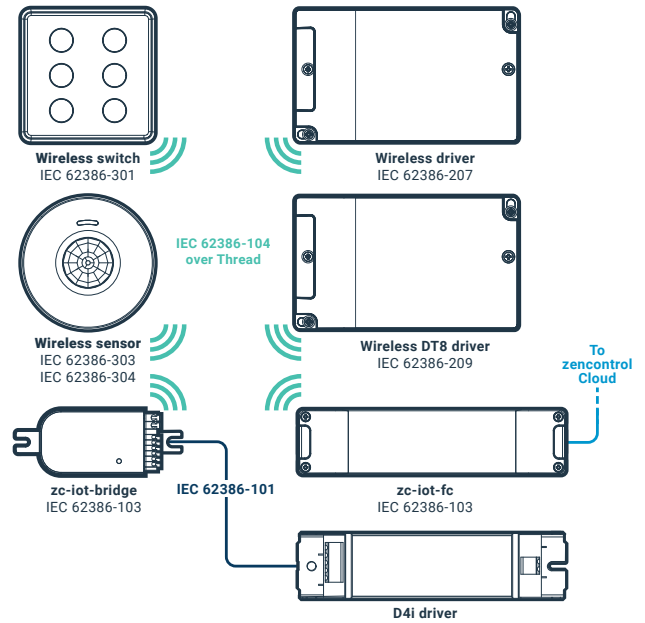

Accessory range

Fig.	Order code	Description
6	zc-smart-wall-kit	Smart sensor wall mount kit
7	zc-smart-sm-kit	Smart sensor surface mount kit, suitable for surface, rod and conduit mounting
8	zc-rodmount-wht	Rod mount kit, white, to be used with Smart sensor surface mount kit
9	n/a	Conduit mount, not supplied by zencontrol, used with Smart sensor surface mount kit

