

**Features**

- Multiple finishes available
- Up to 10 units per DALI line
- Models to suit 64 and 80 mm mounting centres
- Customisable labels available for specific applications
- Customised control on DALI application controller
- Automatic control of connected blinds

**Powered by DALI**

No additional supply means energy savings and simple installation

**Integrated illumination**

Configurable inbuilt LED status indicator for user convenience

**DALI-2**

For use with DALI-2 compliant application controller

**Motor control**

Designed for zencontrol blind controllers




Product range

Order code	Description
zc-scene-blind	Scenepanel up/down/stop blind to suit 60 mm wall mount
zc-scene-c-blind	C-clip compatible Scenepanel up/down/stop blind to suit 84 mm wall mount


Features

- Multiple finishes available
- Up to 10 units per DALI line
- Compliant to IEC 62386-301*
- Automatic control of connected blinds
- Models to suit 60 and 84 mm mounting centres
- Customisable labels available for specific applications
- Control multiple devices at once with control system configuration

Dimensions

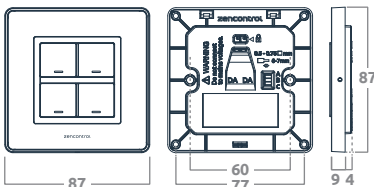

To suit 60 mm wall mount
Dimensions 87 / 87 / 13 mm
Mounting centres 60 mm

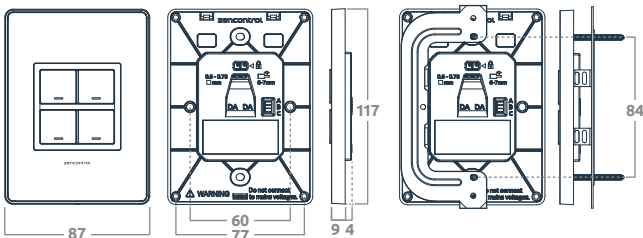

To suit 84 mm wall mount
Dimensions 87 / 117 / 13 mm
Mounting centres 84 mm

With c-clip

Specifications

Supply	DALI
Control system	DALI-2
DALI line current	15 mA
Wiring	0.5 - 0.75 mm ² Strip 6 - 7 mm
Operating temperature	0 to 45°C
Material	PC UV stabilised, ABS, 316 stainless
Ingress protection	IP20
Compliance standards	IEC 61347-2-11 CISPR 15 IEC 62386-301 EMC-2004/108/EC LVD-2006/95/EC

Notice

- The switch must not be connected to any mains. It is powered directly from the DALI line.
- The DALI line is not SELV. It must be treated like LV mains and treated with the same precautions and wiring regulations.
- Compatible with zencontrol control system with a firmware version of 00.08.10 or above

Configuration

- The Scenepanel model presents on a DALI line as a single device with 3 push button instances.
- When used with zencontrol controllers the Scenepanel will automatically be configured to send up, down and stop commands to the connected blinds by default.
- Actual function is dependant on the configuration of DALI-2 Application controllers connected to the DALI line.