



Features

- Compatible with DALI and DALI-2
- Simple linking of rooms / groups with SELV inputs
- Automatic commissioning of standard features
- Zero commission for basic building
- 10 SELV switch inputs for local lighting control
- Built in DALI power supply
- Up to three lighting circuits (any phase)
- Upgradeable to match changes in DALI standards



DALI device

DALI compliant and compatible



Simple setup

Simple out of the box setup and installation



Compatible cords

Compatible w. zencontrols extensive cabling system



Simple linking

Simple linking of rooms / groups with SELV inputs




Product range

| Order code | Description |
|---------------|------------------------------|
| zc-room-basic | Basic room controller |
| zc-room-lite | Lite room controller |
| zc-room | Full feature room controller |

Features

| Model | Full feature | Lite | Basic |
|---|--------------|------|-------|
| 10 SELV switch inputs | ✓ | ✓ | |
| Serial interface, supporting SCI mode 1 | ✓ | | |
| Two volt-free outputs | ✓ | | |
| 10x switched relay outputs | ✓ | | |
| Three lighting circuits | ✓ | ✓ | ✓ |
| DALI power supply | ✓ | ✓ | ✓ |
| DALI application controller | ✓ | ✓ | ✓ |
| Ethernet 10 / 100 | ✓ | ✓ | ✓ |
| 10 channel output | ✓ | ✓ | ✓ |
| Automatic DALI grouping | ✓ | ✓ | ✓ |
| System relay / emergency test contact | ✓ | ✓ | ✓ |
| Room control mode | ✓ | ✓ | ✓ |
| Real time clock | ✓ | ✓ | ✓ |
| BACnet (upgradeable) | ✓ | ✓ | ✓ |
| KNX (upgradeable) | ✓ | ✓ | ✓ |

Dimensions

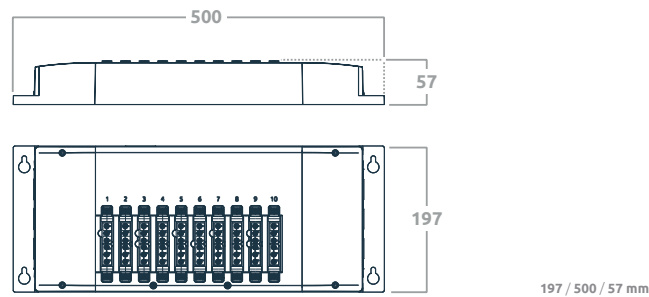

Specifications

| | |
|-----------------------|--|
| Supply voltage | 230 V ~ 50 Hz |
| DALI supply current | 235 mA |
| Relay rating | Switched live 10 A Switched permanent live 6 A |
| Terminal capacity | Mains 1 - 4 mm ² Digital I/O 0.5 - 2.5 mm ² |
| Lighting circuits | 3 |
| Load per circuit | 10 A |
| Load per channel | 6 A fluorescent and incandescent lighting 3 A compact fluorescent lighting 3 A low energy lighting 3A fans and ventilation equipment DALI power supply 16.5 Vdc 235 mA |
| Operating temperature | 0 to 45°C |
| Material | PC |
| Classification | Class I |
| Mounting | Independently mounted control for surface mounting |
| Compliance standards | IEC 61347-2-11 IEC 60669-2-1 IEC 60950-1 CISPR 15 CISPR 22 EN 55015 EN 55022 IEC 62386-301 EMC-2004/108/EC LVD-2006/95/EC |

Accessories range

For cordsets see datasheets at zencontrol.com/downloads